


RINGOMAT "S" SERIES: THE ULTIMATE RING SPIRAL MACHINE



The "RINGOMAT S" series have been developed for the high volume production of circular (ring) reinforcing stirrups and ring spirals.

The bending system employs a three-roller ring-forming device with two adjustable rollers

The cutter is located after the last bending roller ensuring that no straight sections are left.

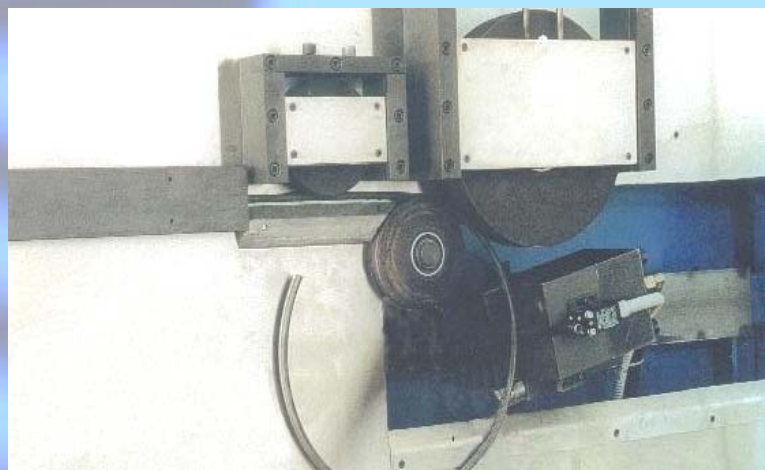

The lower rollers of the straightening device are powered providing an evenly distributed feeding force.

Adjustable counter-torsion (anti-twist) system produces always flat shapes regardless of re-bar quality and axial twist.

Diameter changes can be completed in less than 2 minutes thanks to the Hexagon shaft pre-setting system

The RINGOMAT "S" Series can be equipped with:

- Collecting devices
- Product support rollers (adjustable)
- Pitch adjusting mechanism
- Automatic bending roller adjusting mechanism

Three models are available, covering the following diameter ranges:

- 0.157"-0.314" (4-8mm)
- 0.196"-0.472" (5-12mm)
- 0.236"-0.629" (6-16mm)



For a free video, CD and your nearest EUROBEND representative, please, contact:

EUROBEND S.A.
ADVANCED TECHNOLOGY PRODUCTS

350, TATOIOU AVE. AHARNES 13677
ATHENS - GREECE

TEL: ++30 210 8077775 FAX: ++30 210 6206567

WEBSITE: <http://www.eurobend.com> e-mail: sales@eurobend.com

